

# NOVA LUCE

## PRODUCT DATASHEET

Version: 001

### PRODUCT PHOTOGRAPH




### GENERAL INFORMATION

Product Code	<b>9050809</b>
Product Category	<b>Floodlights</b>
Product Family	<b>Grotto</b>
Mounting Location	<b>Ground/Wall</b>
Application Environment	<b>Outdoor</b>

### DIMENSION & WEIGHT

LxWxH (cm)	<b>L: 14 W: 2.6 H: 10.2</b>
Cut out (cm)	<b>-</b>
Weight (Kgr)	<b>0.24</b>

### TECHNICAL DRAWING

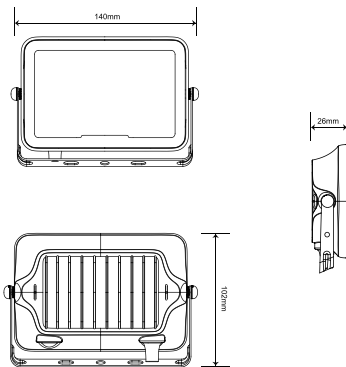

### MATERIAL & COLOR

Product Color	<b>Black</b>
Body Material	<b>Aluminium</b>
Cover Material	<b>N/A</b>

### APPLICATION & MOUNTING

Ambient Working Temp.	<b>Max 40 oC</b>
Type of Protection	<b>IP66</b>
Protection Class IK	<b>IK06</b>
Dimmable	<b>N/A</b>
Type of Dimming (Optional)	<b>N/A</b>
Mounting type	<b>Surface</b>
Mounting Depth (cm)	<b>N/A</b>
Led Module Replaceable	<b>No</b>
Light Source	<b>Led</b>

### COMPATIBLE WITH

- On/Off Driver: Included
- Triac Driver: N/A
- Dali Driver: N/A

NOVA LUCE S.A

Schimatari Viotias  
32009, Greece

+30 22620 58 121  
+30 22620 56 743

info@novaluce.com  
www.novaluce.com



# NOVA LUCE

## PRODUCT DATASHEET

Version: 001

### ELECTRICAL DATA

Power (Nominal)	<b>20W</b>
Input voltage (Nominal)	<b>220-240Vac</b>
Mains Frequency	<b>50/60Hz</b>
Output voltage	<b>N/A</b>
Output Current	<b>N/A</b>
Power Factor	<b>0.9</b>
Efficiency	<b>N/A</b>
SVM	<b>N/A</b>
Pst	<b>N/A</b>
Class	<b>I</b>

### PHOTOMETRICAL DATA

Luminous Flux	<b>2250lm</b>
Luminous Efficacy	<b>112lm/w</b>
Color Temperature	<b>6500K</b>
Light Color (Designation)	<b>Cool White</b>
CRI	<b>&gt;80</b>
Step MacAdam	<b>&lt;6</b>
Beam Angle	<b>120°</b>
UGR	<b>N/A</b>

### LIFESPAN

Lifetime	<b>30000h</b>
----------	---------------

### CERTIFICATES

Certificates	<b>CE</b>
--------------	-----------

### WARRANTY

Warranty	<b>5 years</b>
----------	----------------

### LIGHT DISTRIBUTION

NOVA LUCE S.A

Schimatari Viotias  
32009, Greece

+30 22620 58 121  
+30 22620 56 743

info@novaluce.com  
www.novaluce.com

